


AIR QUALITY CO2

GHG-CCI CRDP#1

Carbon Dioxide (CO₂) - NH (0°-60°N)

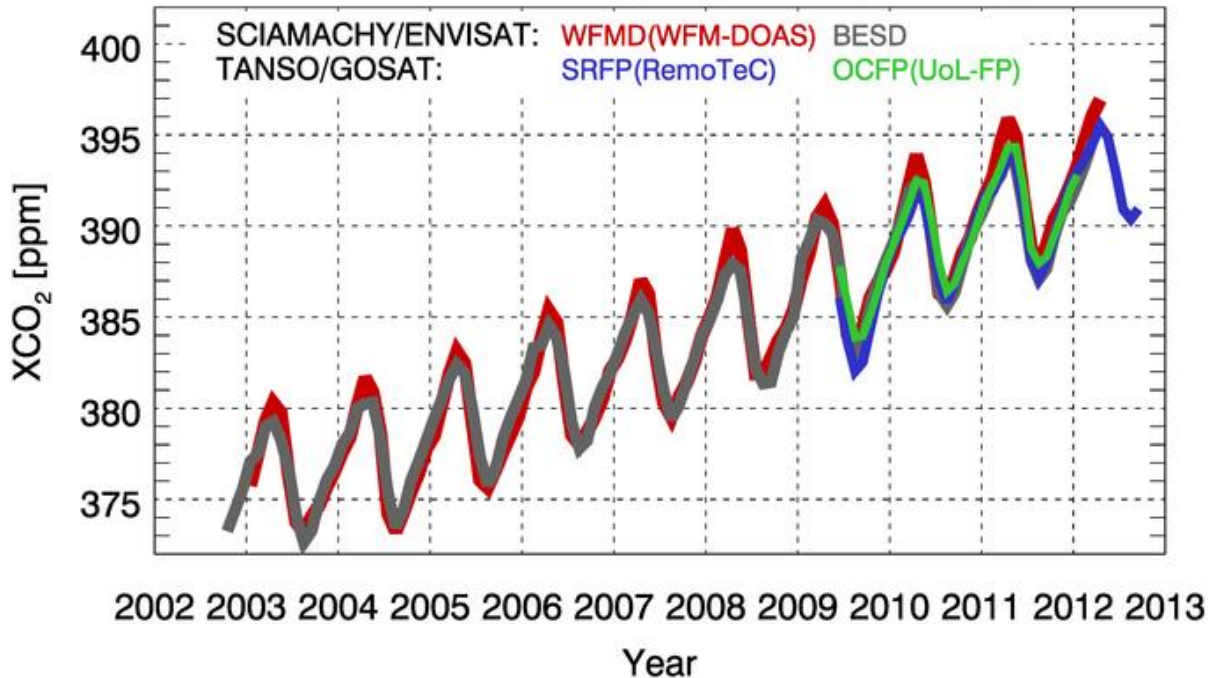

Satellite observed variability in XCO₂ concentrations over time (source: University Bremen/ESA)

PRODUCT DESCRIPTION

Category

- | | |
|--|---|
| <input type="checkbox"/> Topographic information | <input type="checkbox"/> Surface deformation |
| <input type="checkbox"/> Impact assessment | <input type="checkbox"/> Precision ortho-images |
| <input checked="" type="checkbox"/> Change detection / continuous monitoring | <input type="checkbox"/> Terrain information |
| <input type="checkbox"/> Land cover / use | <input type="checkbox"/> Water quantity & quality |
| <input type="checkbox"/> Near surface geology | |

Uses

Environmental Assessment & Permitting – Mining companies need to understand what impact they may have on the air quality around the operation for the people and the environment.

Design, Construction & Operations – Measurement and monitoring of the quantity of different particulates to the atmosphere.

Closure and Aftercare – During closure and aftercare period should be demonstrated that there are no ongoing air emissions from the site and emissions return back to baseline

Challenges addressed

Permitting Process – Air quality

Development and Operations – Environmental Monitoring

Closure and Aftercare – Environmental Monitoring

Geo-information requirements

P-6 Ambient Air Quality / Particulate Fallout

DO-24 Monitoring air emissions – point source

DO-25 Monitoring air emissions - fugitive

CA-7 Demonstration of return to baseline air quality – including deposition

Description

This product provides information on atmospheric carbon dioxide (CO₂) – one of the most important greenhouse gases that contribute to global warming. Space-based remote sensing of the CO₂ column-average dry air mole fractions (XCO₂) has the potential to provide observed global constraints on CO₂ fluxes across the surface-atmosphere boundary and to provide insight into the related biogeochemical cycles. XCO₂ products retrieved from these satellites have been validated with reference to high-resolution ground-based Fourier Transform Spectrometers (g-b FTS) data and model data.

The Japanese Greenhouse Gases Observing Satellite, GOSAT, is the first satellite designed specifically for this application. GOSAT has been collecting CO₂ and methane (CH₄) observations over the sunlit hemisphere since April 2009. These data are beginning to yield new insights into the carbon cycle. Furthermore, in July 2014 NASA launched the second satellite dedicated to the measurement of CO₂- the Orbiting Carbon Observatory-2 (OCO-2). The OCO-2 satellite is being operated by NASA's Jet Propulsion Laboratory and its stated mission objective is to "Collect the first space-based global measurements of atmospheric CO₂ with the precision, resolution, and coverage needed to characterize its sources and sinks on regional scales and quantify their variability over the seasonal cycle". The spatial resolution of these instruments is relatively low (GOSAT: ~ 1 x 1 km²; OCO-2: ~ 1.5 x 2.5 km²). The major focus of both of these missions is the determination of the global CO₂ burden and its regional variations. OCO-3 is launched in May 2019 and will follow up on the OCO-2 observations onboard the International Space Station (ISS). GOSAT-2 has been launched in 2018 and the expected release of data is in 2019.

In contrast, the first mission dedicated to the high-resolution measurement of CO₂ and CH₄ emissions from space is the commercial satellite GHGSat, which was launched in 2015. GHGSat spatial resolution is 50 x 50 m², within a ground footprint of 10 x 15 km². This allows high precision mapping of emissions from identified target sources as opposed to obtaining averages over large areas. Their demonstrator satellite could detect modest leaks from individual wells.

Additionally to the satellite observations there are airborne observations that complement EO-based data within the Active Sensing of CO₂ Emissions over Nights, Days & Seasons (ASCENDS) initiative. Furthermore the Space CARBon Observatory (SCARBO) aims at supplementing the existing products with observations by multiple nano-satellites. This will result in more accurate observations of CO₂. The launch of these nano-satellites are planned to be in 2028. Other future initiatives include MicorCarb (CNES) that is expected to be launched in 2020 and GOSAT-3 (follow-up of GOSat-2 with expected launch 2022).

Known restrictions / limitations

Spatial resolution of carbon dioxide retrievals from satellite-based EO are relatively coarse – native resolution of sensors on existing missions is approximately 4 km² (OCO-2) to 75 km² (GOSAT). Regional chemical transport models, used to assimilate the measurements of these missions have typical spatial resolutions ranging from 12 x 12 km² to 3 x 3 km².

Future systems or commercial systems should provide improved retrievals.

Lifecycle stage and demand

Exploration	Environmental Assessment & Permitting	Design, Construction & Operations	Mine Closure & Aftercare
■	■■■■	■■	■■

Environmental Assessment & Permitting: Mining companies need to understand what impact they may have on the air quality around the operation and what impact this air quality might have on people and the environment. As part of the permitting process it is necessary to establish what the baseline is, and to demonstrate that this will not be materially affected when mining operations are underway and when the mine is closed and rehabilitated. Sampling will be required over a wide area and will typically be governed by dispersion modelling. A 10 km² area may be taken as typical for monitoring of ambient air for a mid-size mining operation. Within this 10 km² area in the order of 10 to 20 sampling points may be established. There are sulphur (CO_x, NO_x and SO_x). Individual metal parameters within the air column can also be determined. The amount of particulate that falls out on to the ground can be measured on a per m² basis (typically 'X' mg/ m²/day). Minimum levels of detection can be taken from 'Technische Anleitung zur Reinhaltung der Luft', which is a comprehensive document issued by the German government, which describes air quality standards. This document, commonly referred to as the 'TA Luft', is used by many countries and organisations as a reference for air quality.

Design, Construction & Operations: Mining operations will have point source air emissions from ventilations shafts, processing plants, labs, power plants etc. Measuring the quantity of different parameters emitted into the atmosphere (gaseous and solid) is an important aspect for mining companies to manage their potential environmental impact. Typical parameters are CO_x, NO_x, SO_x, Particulate, H₂S. The area required to be assessed will be dependent on the footprint of the mining operation and could be 1 km² to 10 km². Air emissions can result in transboundary impacts on air quality beyond the site boundary. The extent of transboundary impact depends on the nature of the emission and also prevailing weather conditions and geographic features. Given the mobility of air emissions, an area of hundreds of km² may need to be monitored. Air emissions will take place on a continuous basis. Many air emissions will be stable and infrequent measurement of monthly to quarterly will be sufficient. Other emissions will be more variable and subject to disruption, these would ideally be measured on a continuous basis. In addition to point source air emissions, mines will have significant fugitive air emissions, these can be plumes from pit blasts, dust from vehicular movement, dust blow off TSF / WRD, and fires. Monitoring for fugitive emissions is an important aspect for mining companies to manage their potential environmental impact. This fugitive monitoring can also be used to identify sources of emission and implement corrective actions (including identifying spontaneous combustion fires and arrange to have these extinguished). The frequency required for monitoring this parameter is site specific. In many instances monthly would be sufficient but in particular for the identification of spontaneous combustion continuous monitoring would be of benefit

Mine Closure & Aftercare: Monitoring will be required during the closure and aftercare period to demonstrate that there are no ongoing air emissions from the site that could cause an impact. Point sources will no longer be operational. The focus will be on fugitive emissions from WRD's and TSF's. Assessment of this parameter will involve field work including measurement of air quality for various parameters and measurement of particulate fallout. Depending on climatic conditions air emissions can travel long distances. The area to assessed can be hundreds of km². Monthly data is sufficient, this can be used to calculate daily deposition rates

Geographic coverage

Coverage is global

EARSC Thematic Domain

Domain *Atmosphere and Climate*
 Sub-domain *Atmosphere*
 Product description *Monitor Air Quality and Emissions*
 on

PRODUCT SPECIFICATIONS

Input data sources

Satellite	<i>GOSAT</i>	<i>OCO-2</i>	<i>GHGSAT</i>	<i>SCARBO</i>	<i>MicoCarb</i>
Status	Operational	Operational	Operational	Planned	Planned
Operator	JAXA	NASA-JPL	GHGSAT	Airbus	CNES
Data availability	Public	Public	Commercial	n/a	Public
Resolution (m)	1 km	1.5x2.5 km	50 m	n/a	2x2 km
Coverage	Global	Global	Target anywhere globally	Target anywhere globally	Global
Frequency (days)	3 days	16 days	n/a	n/a	16 days
Launch year	2009	2014	2016	2030	2022
Website	link	link	link	link	link

Archived satellite products include the ENVISAT SCIAMACHY sensor.

Minimum Mapping Unit (MMU)

n/a (the product is directly based on the input data; the smallest unit is 1 pixel).

Accuracy / constraints

Thematic accuracy: *Atmosphere– Monitor Air Quality and Emissions. 80%*

For the mining industry the targeted nano-satellites probably are the most suitable source of information, because emissions from water plumes can be very low. Probably the emissions caused by mining activities won't cross the threshold in background values of the larger satellites.

Spatial accuracy: See above. Needed accuracy in the mining sector is often for large areas in relatively high spatial resolution.

Accuracy assessment approach & quality control measures

This is done by field validation using in-situ measurements.

Timeliness

n/a


Availability

Data is typically freely available for non-commercial use through the open data policy of the different space agencies. See for an overview of the used satellites the table above.

Delivery / output format

Typically, the datasets are delivered in HDF5, NetCDF, binary or in shapefiles.

Use Case

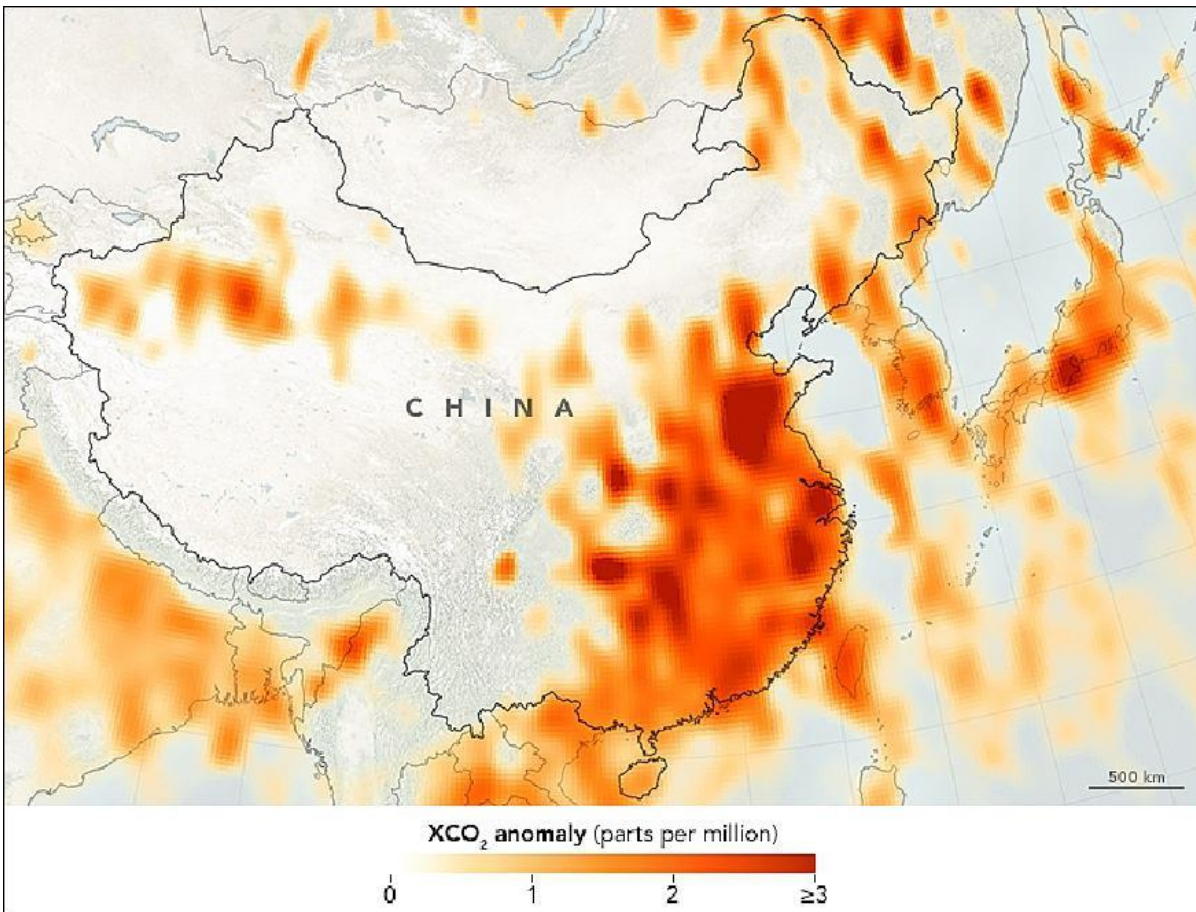

Source: NASA Earth Observatory, maps by Joshua Stevens, using OCO-2 anomaly data

CO₂ observations based on observations from OCO-2 revealing major anthropogenic sources of CO₂, as shown for example here in this figure over Eastern China (Hakkarainen, 2016). Other regions include Europe and USA and individual cities.

Author(s): Margreet van Marle, [Author 2]

Document Title: Air Quality CO2

of Pages: 5

Circulation: Internal – Project consortium and industry partners
External – ESA

REVISION LOG

(to be filled out by authors/reviewers/word processors)

Revision				Description
Number	Date	Revised By	Approved By	
Version 0.1	August 19, 2019	Margreet van Marle		Provision of first Word version
Version 0.2	September 24, 2019	Margreet van Marle		Provision of revised Word version