
# **Product Sheet: Water Quality**

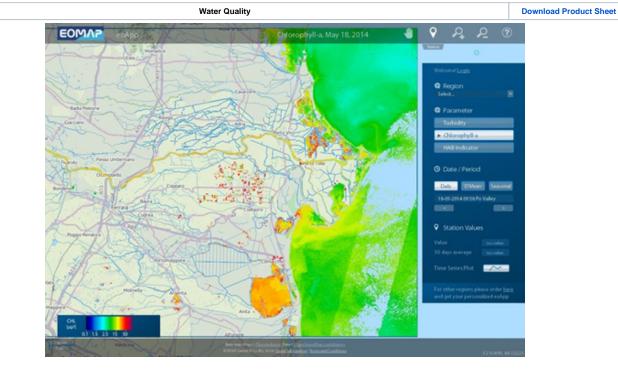

#### Chlorophyll Content (Source: EOMAP)

# PRODUCT DESCRIPTION

# Category

Topographic information Surface deformation Precision ortho-images Impact assessment Change detection / continuous monitoring Terrain information Land cover / use Water quantity & quality Near surface geology

# Uses

- Water quality monitoringEnvironmental monitoring

# Challenges addressed

- Permitting Process Water catchment
  Development and Operations Environmental Monitoring

Closure and Aftercare - Environmental Monitoring

### **Geo-information needs**

- P-5: Receiving Waters characterization & Assimilative capacity
- DO-20: Monitoring routine water emissions
  DO-21: Monitoring of any pollution plumes / algal blooms / sediment accumulation etc.
  CA-9: Demonstration of return to baseline water quality
  CA-10: Plume tracing of leaks or seepage (surface water / groundwater / soil)

- CA-13: Pit water chemistry

### **Description**

The assessment of water quality is vital during mining activities as well as in the aftercare. Spatial and temporal information can be provided to identify the ecological status of waters as well as changes and trends. Various water quality problems can be detected, such as point source pollution, sedimentation, harmful algae blooms or aquatic weeds. Gradual and abrupt changes might be detected. Long-term or gradual changes are usually indicated by long-term events such as climate change, whereas abrupt changes usually suggest point source pollution from industry.

The Total Suspended Matter (TSM) is one indicator that can be calculated. Through the spectral response and reflectance of electromagnetic radiation, parameters and concentrations of sediment can be detected. Furthermore, the phytoplankton biomass indicates concentrations of chlorophyll in water bodies. Spatial distributions and temporal changes can be derived. Using thermal infrared sensors, the measurement of water temperature is possible. The Diffuse Attenuation Coefficient reports on the transparency of water by computing the upwelling radiances at a special wavelength of 490 nm.

For processing, imagery from sensors MODIS, Landsat 8, Sentinel-2 or Sentinel-3 might be used. The final product may be a report with various indicators with maps visualizing the current status of the parameters, changes and highlighting problematic changes. Also, web browsers and apps are a possible way of delivering the various indicators. Due to the continuous observation from space, a constant monitoring of these indicators is possible. However, the frequency is dependent on the revisit time of used input data source.

#### **Known restrictions / limitations**

Although used satellites have a high temporal observation frequency, the information might be limited by the coarse spatial resolution, dependent on the satellite data used. Furthermore, sun glint or haze on satellite imagery might make them useless.

### Lifecycle stage and demand

Exploration	<b>Environmental Assessment and Permitting</b>	Design, Construction and Operations	Mine Closure and Aftercare

#### Environmental Assessment & Permitting:

Characterizing receiving waters and assessing assimilative capacity.

Design, Construction & Operations:

Monitoring of water quality.

Mine Closure & Aftercare:

Demonstrate water quality has returned to baseline conditions or to other agreed endpoints.

#### Geographic coverage

Globally available.

# **EARSC Thematic Domain**

Domain	LAND	OCEAN & MARINE	
Sub-domain	Inland Water	Coastal	
Product description	Assess and monitor water bodie	Assess and monitor coastal water quality	

# PRODUCT SPECIFICATIONS

#### Input data sources

Satellite	Sentinel 2	Landsat 8	MODIS	Sentinel 3		
Status	In operation	In operation	Archive	In operation		
Operator	ESA	NASA	Digital Globe	ESA		
Data availability	Public	Public	Public	Public		
Resolution (m)	10 - 60	15 - 100	1 – 4	300		
Coverage	Global	Global	Global	Global		
Frequency (days)	5	16	< 3	27		
Launch year	2015	2013	1999 - 2015	2016 / 2018		
Website	link	link	link	link		

### **Minimum Mapping Unit (MMU)**

Variable, depending on source data resolution.

### Accuracy / constraints

Thematic accuracy:

Water quality problems such as point source pollution, sedimentation, harmful algae blooms or aquatic weeds can be detected.

Spatial accuracy:

Dependent on input pixel resolution; typically 0.5 - 1 pixel.

### Accuracy assessment approach & quality control measures

N/A (A validation of remote sensing analyses with ground truth data might be required; fieldwork might be thus required or the installation of water quality stations.

### Frequency / timeliness

Observation frequency:

Timeliness of deliverable:

# **Availability**

Data from all Sentinel satellites are freely available through the open data policy of the operator ESA (Sentinel-2A since 2015, Sentinel-3A since 2016, Sentinel-2B since 2017, Sentinel-3B since 2018).

Data from Landsat 8 (since 2013) are freely available through the open data policy of the operator USGS.


# **Delivery / output format**

Data type: Raster formats

File format: Geotiff

Further delivery formats: Paper maps, Reports, Indicators, web portal

# **USE CASE**

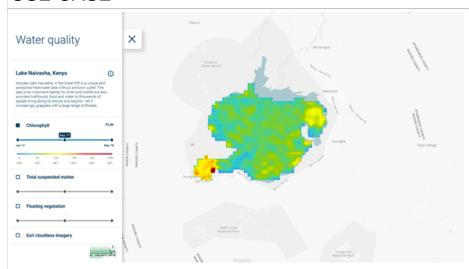

Source: GlobWetland, http://globwetland-africa.org/

This image shows the chlorophyll concentration of Lake Naivasha, Kenya. Together with the turbidity and the Total Suspended Matter, these indicators provide parameters for the water quality. The picture indicates, that water quality may also be assessed on smaller inland water lakes. Data can be easily shown on a portal where the different layers are to be selected to enable a good examination on water quality.